



INVESTIGATION OF SEPARATION OF USABLE FIBERS ADDED TO CONTAMINANTS DURING CLEANING COTTON

Sarimsakov Olimjon Sharipjanovich

*Prof. The Head of Department of Technology of Initial
Processing of Natural Fibers*

Namangan Institute of Engineering and Technology

Yo'ldashev Xasanboy Sulaymon O'gli

*Doctoral student of Department of Technology of Initial Processing of Natural
Fibers Namangan Institute of Engineering and Technology*

Sharapova Xayrullo Numonjonovich

*PhD. Teacher of Department of Technology of Initial Processing of Natural Fibers
Namangan Institute of Engineering and Technology*

Madumarov Sanjarbek Rustamjonovich


*Teacher of Department of Technology of Initial Processing of Natural Fibers
Namangan Institute of Engineering and Technology*

Abstract. *Lint cleaners were developed specifically for removing leaf particles, motes, grass, and bark that remain in cotton after seed cotton cleaning, extracting, and ginning. They were developed and improved in conjunction with the transition from manual to mechanized harvesting of cotton during the 1980's. Virtually all gins in the Agriculture of Uzbekistan have lint-cleaning facilities, and over four-fifths of the gins have two or more stages of lint leaning. The lint cleaners now being marketed are of two general types, flow-through air type and controlled- batt saw type.*

Objective. Modern gin stands are equipped with both overhead and gravity mooting systems. The seals on the overhead mooting system, whether dropper wheel or roller type, should be kept in good condition. In some gins, pressure is maintained in the overhead mooting chamber, and the system will not operate properly if the seals leak excessively. Honeydew and green, wet lint sometimes cause motes to be sticky and build up on the mooting bars, wiper flights, and roller seals. Such a buildup drastically reduces mooting system effectiveness. Under extreme conditions the buildup will cause choke in the gin ribs. The gin saws should be stopped and the power locked out before cleaning the mooting system.

Methods. A profitable cotton crop includes two basic components: high yield and high-quality lint. Good season-long cultural practices are associated with high yields, and timely cultural practices also complement harvest preparation. A well-fruited, uniform crop begins with an early, uniform stand of vigorous plants and with early season insect control.

Results. Study results provide useful guidelines on how storage variables affect quality. These results clearly show that, while it is impossible to predict

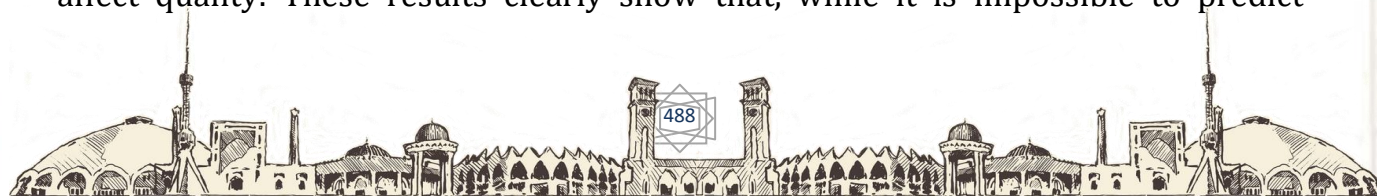

precisely how storage variables will affect quality, guidelines for safe, effective storage are useful.

Conclusion. Studying foreign technologies will motivate us to improve our existing technologies. Studying the design of Linter device in foreign technology and applying ourselves in our technology will lead to the improvement of lint quality.

Keywords: Linter, controlled-batt saw, saws, quality, cleaner, ginning, rollers, feed-roller, grid bar, condenser screen drum, brush, batt, doffing brush cylinder, feed plate, vane-axial fan

Introduction

The controlled-batt saw cleaner is now the most common lint cleaner in the ginning Industry. Lint from the gin stand or another lint cleaner is formed into a batt on a condenser screen drum. The batt is then fed through one or more sets of compression rollers, passed between a very closely fitted feed roller and feed plate or bar, and fed onto a saw cylinder (fig.1). Each set of compression rollers rotates slightly faster than the preceding set and causes some thinning of the batt. The feed roller and plate grip the batt so that a combing action takes place as the saw teeth seize the fibers; the feed plate clears the saw by about one-sixteenth inch. The teeth of the saw cylinder convey the fibers to the discharge point. While the fibers are on the saw cylinder, which may be 12-24 inches in diameter, they are cleaned by a combination of centrifugal force, scrubbing action between saw cylinder and grid bars, and gravity assisted by an air current. The fibers may be doffed from the saw teeth by a revolving brush (figs.2 and 3) or air suction. When brush doffing, the tip speed of the brush should be 1.5-2.0 times the tip speed of the saw. The principal features and settings of saw lint cleaners used in most gins are given in table 1, and their recommended installations and power requirements are given in table 2. Methods. There have various constructions in foreign enterprises. An important factor in the operation of the cleaner is the condition of the batt as it is fed to the saws. If the batt is thicker on one side of the condenser drum or if it is too thin or broken, the lint cleaner will not operate properly.

Figure 1. Feed works
of a controlled-batt saw
lint cleaner (Clean master
lint cleaner, courtesy of
Continental Eagle Corporation)

Figure 2. Unit controlled-batt saw lint cleaner with brush doffing (Lummus model 86 or 108 lint cleaner, courtesy of Lummus Corporation)

Figure 3. Unit controlled- batt saw lint
cleaner (Continental model 24-D Golden Eagle
lint cleaner, courtesy of
Continental Eagle Corporation)





Results. The following results were seen and compared with our own technologies

Table 1. Principal features and settings of saw lint cleaners

Nº	Manufacturer and make	Saw diameter (inches)	Saw speed (rpm)	Grid Bars (number)	Feed-roller Diameter (inches)	Settings	Feed plate to saws (inch)	Feed roller to feed plate (inches)	Grid bar to saw (inches)
Doffing system									
1	Consolidated HGM Corp Multisaw Super	86 inch							
	Top saw	16	1,220	7	4-1/2	5/64	0.010-inch, floating spring load		
							0.030 Brush, 18-inch diameter		
2	Bottom saw	24	1,040	6					0.042
3	Super 66 inch	16	1,200	7	4-1/2	5/64	0.010-inch, floating spring load		
							0.030 Brush, 18-inch diameter		
4	Continental Eagle Corp. Sixteen D								
5	66 inches	16	1,214	5	4-7/16	3/32	0.010-inch, spring loaded		
							1/16Do		
6	94 inches	16	1,214	5	4-7/16	3/32	do	1/16	Do
7	Lummus Corporation								
8	Model 66	16	800-1,200	2	4	1/16	0.005 inch, floating spring loaded	1/32	Brush, 15-inch diameter
9	Model 86	16	800-1200	2	5-3/8	1/16do....	do....
	Do								
10	Model 108	16	800-1200	2	5-3/8	1/16do....	do....
	Do								


Do= ditto

1. All makes of machinery have a 1/16-inch feed roller-to-saw setting

2. a speed of 1,000 rpm is most common


Table 2. Power requirements and recommended installation of saw lint cleaners

Nº Make Condenser

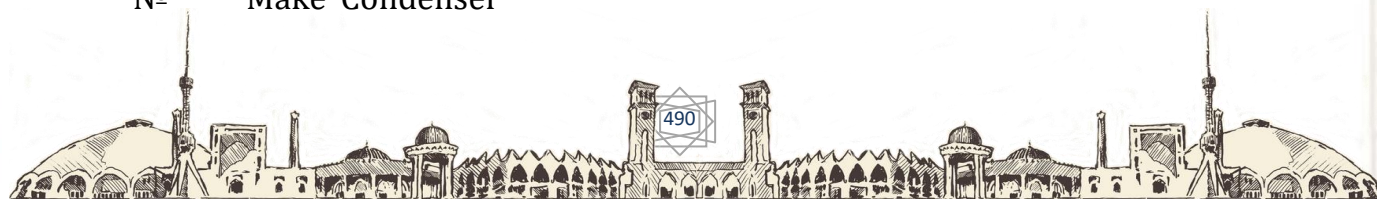



Diameter (inches)									
	Axial-flow fan								
Horsepower	Recommended installation							Capacity	
(bales/hr)									
Horse									
power	Type and size								
Consolidated HGM Corp.									
1	Multisaw Super 86 inch	50	15;	25V.A.,	29				
	V.A., 36 5., feedworks;								
	40, stipped cotton								
	., picked cotton		Single unit or battery unit or as a second stage					8-10	
2	Super inch 50	10-15 C.A., 4225....					5-7	
3	Super 86 inch	50	15;	25V.A.,	29				
	V.A., 36 5. feedworks;	30, no fan;	40, with fando....				8-10	
	Continental Eagle Crop.								
4	Sixteen D:								
	66 inch 24	5 per unit	V.A., 2615....		Unit behind each gin			
	stand, single and tandem	8							
	5 94 inch	24	10 or 20	V.A., 26 single or tandem30....do....			
	12								
	6 Constellation	50	5-20	V.A., 42"	30	Battery unit or tandem.			
	12								
	7 Super Constel	50	Two 5-20	V.A., 42"	Two 30's	Battery unit			
	or tandem,								
	split stream.	24							
	8 Lummus Corporation								
	Model 66	24	3-20 as required	V.A., 18", per					
	machine; V.A.,								
	24", per two								
	machines.	...15... Behind each gin stand,							
	single and tandem or								
	split stream.	4-6 per machine							
	2-3 when split								
	Model 66	24	...do....	...do....	...15-20..	Battery units, single			
	and split stream.	4-6 per machine							
	Model 86	30	10-30 as required	V.A., 24", per					
	single or double machine.	30 per machine				Behind each gin stand,			
	single and tandem, or								
	split stream.	6-10 per machine							
	Model	30	...do....	...do....	...do....	Battery units, single			

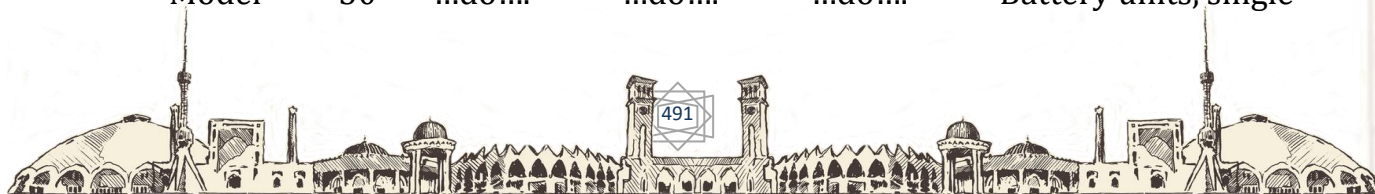



and split stream. 6-10 per machine

3 to 4-1/2 when split

Conclusion. Poor batt conditions can also cause chokes and may damage the equipment. A good batt can be obtained only by having the proper air balance between the gin stand, the condenser, the duct fan, and lint flue. Axial or vane-axial fans, often referred to as clean-air fans, are usually used to discharge air from lint cleaner condensers. If high-efficiency cyclones are required for air pollution control, centrifugal fans should be used to overcome the additional static pressure.

REFERENCES:

1 G.J.Jabbarov,T.U.Otametov,A.Xamidov“Technology of initial processing of seed cotton” Toshkent O'qtuvchi-1987

2 Muhsinov Ibroxim, Isayev Shaxboz,Yuldashev Xasanboy“Theoretical Analysis Of The Motion Of Raw Cotton With Uniform Feeder In A Cotton Cleaner” The American Journal of Engineering and Technology (ISSN - 2689-0984) (2021)

3 Yuldashev Xasanboy, Dusmatov Azamjon “Theoretical Analysis of storing, cleaning, processing of seed cotton” Scientific Journal Impact Factor

4. W.S. Anthony and William D. Mayfield, Managing Editors” Cotton Ginners Handbook”

5. A. Jurayev, X.T. Axmexodjayev, A Bomatov,” Improvement of designs and development of methods for calculating the working organs of cleaning cotton from fine litter” Namangan-2016

6. X.T. Axmedxojoyev, M.A.Tojiboyev, X.N.Sharipov “Improving the fiber separation process” “Istedod ziyo press” Namangan-2021

7. O.Sh.Sarimsakov “Theoretical bases of cotton transfer and pneumatic transport processes” Toshkent-2021

8. Anthony, W.S. 1974. Noise levels of cotton ginning systems. Transactions of the ASAE 21:574-580, 584.

9. Anthony, W.S. 1977. Reduction of lint cleaner brush noise., Technical Proceedings of National Noise and Vibration Conference, Chicago, IL, March 14-17, pp.181-189.

10. Anthony, W.S. 1979. Reduction of vane-axial fan noise in cotton gins. Cotton Gin and Oil Mill Press 80:16-20.

11. Anthony, W.S. 1981a. Acoustical transmission losses in pneumatic systems in cotton gins. Transactions of the ASAE 24:469-475.





12. Anthony, W.S. 1981b. Noise control with viscoelastic materials. Transactions of the ASAE 24:503-508.
13. Anthony, W.S. 1983. Economical control of cotton conveyance noise with viscoelastic materials. Cotton Gin and Oil Mill Press 84:6-7, 10.
14. Anthony, W.S., and O.L. McCaskill. 1978. Low-noise versus standard brush cylinders for gin machinery. Transactions of the ASAE 21:1045-1050.
15. Cooper, W.A. 1974. The ear, hearing, loudness, and hearing damage. In M.J. Crocker, ed.. Reduction of Machinery Noise, pp. 43-50. Purdue University, West Lafayette, IN.
- Harris, Cyril M. 1979. Handbook of noise control. 2d ed. 720 pp. McGraw-Hill, New York, NY.
16. Laird, Weldon, and Joe D. Anderson. 1977. Better doffing: Less noise. Cotton Ginners' Journal and Yearbook 45:30-37.
17. Laird, Weldon, and R.V. Baker. 1982. Confirmation of cotton gin noise by multivariate analysis techniques. Transactions of the ASAE 25:1050-1056. 286
18. Jules Dagenais " History, Properties and Use" 2000 1-145
19. Word-Cotton Lint-Market Analysis,Forecast, Size, Trends and Insights 2020

